

# Whitworth Tapered Pipe Thread

## DIN 2999


### BSPT (British Standard Tapered Pipe)

Specifications of International Thread Standards

## Whitworth Tapered Pipe Thread

Whitworth Pipe Thread for pipes and fittings. Parallel female thread and tapered male thread (taper 1 : 16).

An appropriate sealing compound can be used in the thread to ensure a leak-proof joint.

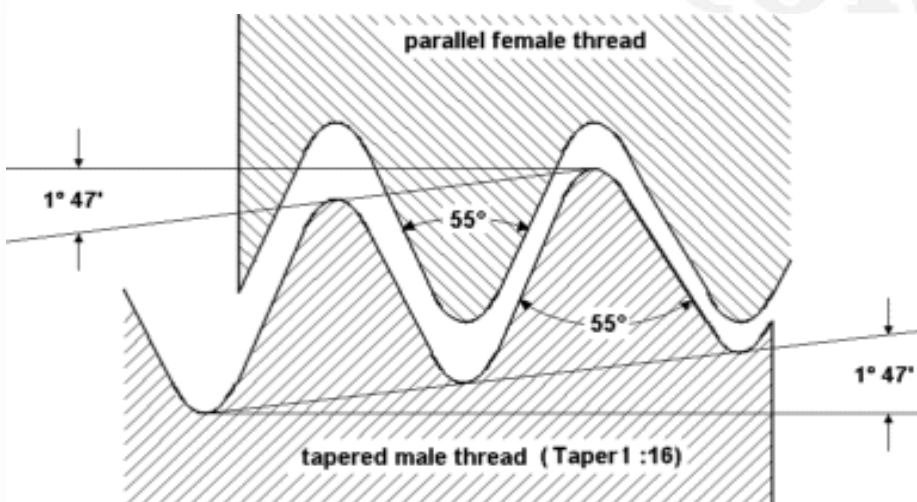

Male Thread Diameter	Female Thread Diameter	Pipe Minor Diameter mm	Pipe Major Diameter mm	Tapping Drill Size mm	TPI	Pitch mm
R 1/16"	Rp 1/16"	3	7,723	6,561	28	0,907
R 1/8"	Rp 1/8"	6	9,728	8,566	28	0,907
R 1/4"	Rp 1/4"	8	13,157	11,445	19	1,337
R 3/8"	Rp 3/8"	10	16,662	14,950	19	1,337
R 1/2"	Rp 1/2"	15	20,995	18,631	14	1,814
R 3/4"	Rp 3/4"	20	26,441	24,117	14	1,814
R 1"	Rp 1"	25	33,249	30,291	11	2,309
R 1 1/4"	Rp 1 1/4"	32	41,910	38,952	11	2,309
R 1 1/2"	Rp 1 1/2"	40	47,803	44,845	11	2,309
R 2"	Rp 2"	50	59,614	56,656	11	2,309
R 2 1/2"	Rp 2 1/2"	65	75,184	72,226	11	2,309
R 3"	Rp 3"	80	87,884	84,926	11	2,309
R 4"	R 4"	100	113,030	110,072	11	2,309
R 5"	Rp 5"	125	138,430	135,472	11	2,309
R 6"	Rp 6"	150	163,830	160,872	11	2,309