


Whitworth Pipe Thread DIN ISO 228 BSP (British Standard Pipe)

Specifications of International Thread Standards

Whitworth Pipe Thread DIN ISO 228 BSP

British Standard Pipe Thread, with sealant compound
(parallel, cylindrical), external = G

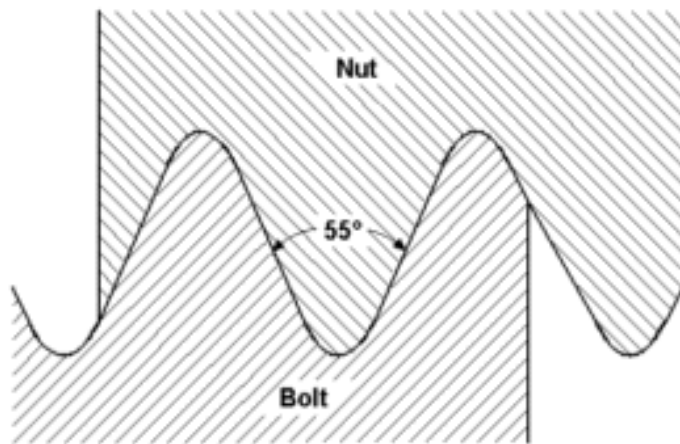

Nominal Diameter	Major Diameter mm	Minor Diameter Nut mm	Tapping Drill Size mm	TPI	Pitch mm
G 1/8"	9,73	8,85	8,80	28	0,907
G 1/4"	13,16	11,89	11,80	19	1,337
G 3/8"	16,66	15,39	15,25	19	1,337
G 1/2"	20,95	19,17	19,00	14	1,814
G 5/8"	22,91	21,13	21,00	14	1,814
G 3/4"	26,44	24,66	24,50	14	1,814
G 7/8"	30,20	28,42	28,25	14	1,814
G 1"	33,25	30,93	30,75	11	2,309
G 1 1/8"	37,90	35,58	35,30	11	2,309
G 1 1/4"	41,91	39,59	39,25	11	2,309
G 1 3/8"	44,32	42,00	41,70	11	2,309
G 1 1/2"	47,80	45,48	45,25	11	2,309
G 1 3/4"	53,74	51,43	51,10	11	2,309
G 2"	59,61	57,29	57,00	11	2,309
G 2 1/4"	65,71	63,39	63,10	11	2,309
G 2 1/2"	75,18	72,86	72,60	11	2,309
G 2 3/4"	81,53	79,21	78,90	11	2,309
G 3"	87,88	85,56	85,30	11	2,309
G 3 1/4"	93,98	91,66	91,50	11	2,309
G 3 1/2"	100,33	98,01	97,70	11	2,309
G 3 3/4"	106,68	104,30	104,00	11	2,309
G 4"	113,03	110,71	110,40	11	2,309